




Ausrack Plus Frame – 600 mm wide

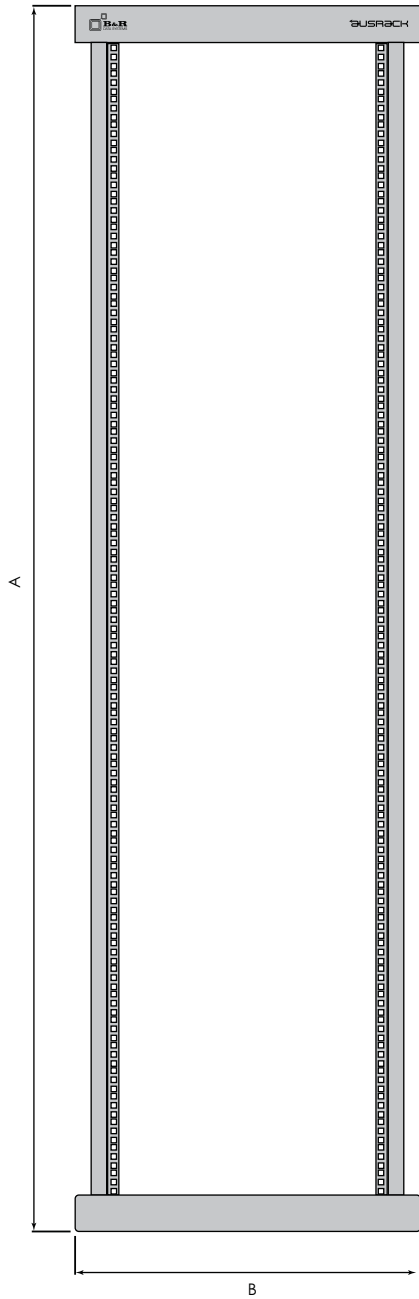

Top

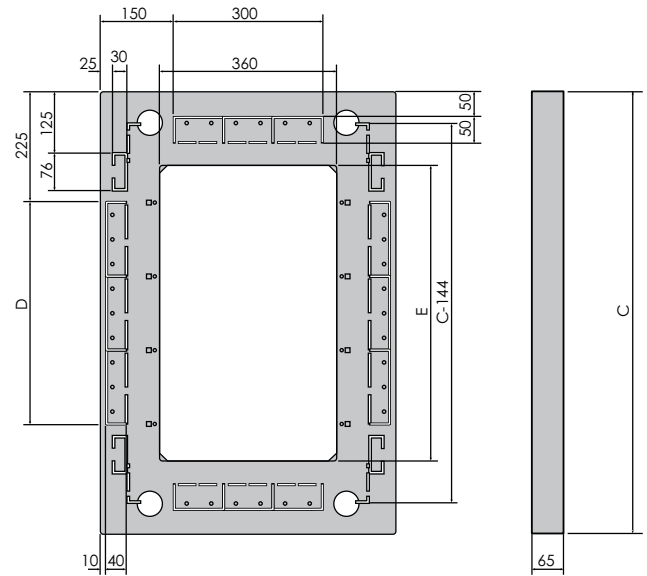


Base

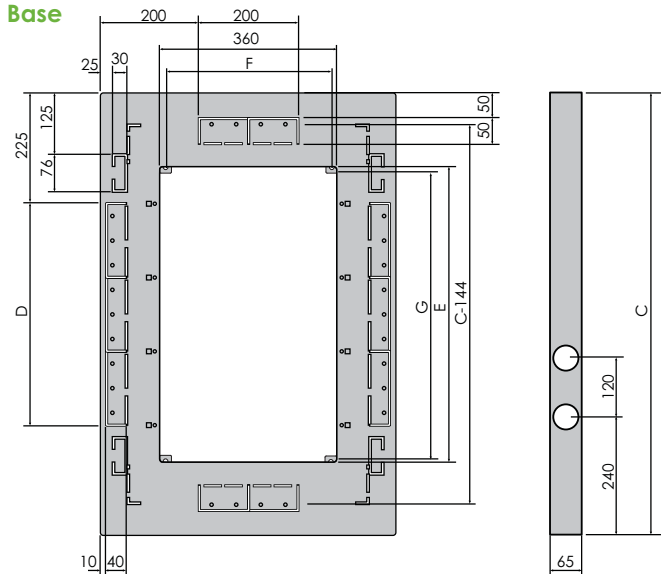


Model No	External Dimensions (mm)			Cable Aperture (mm)		Bolt Down Dimensions (mm)	
	A	B	C	D	E	F	G
AF24U606	1202	600	600	100	300	331.6	251.1
AF24U609	1202	600	900	450	600	331.6	551.1
AF24U611	1202	600	1100	650	750	331.6	751.1
AF40U606	1913	600	600	100	300	331.6	251.1
AF40U609	1913	600	900	450	600	331.6	551.1
AF40U611	1913	600	1100	650	750	331.6	751.1
AF45U606	2135	600	600	100	300	331.6	251.1
AF45U609	2135	600	900	450	600	331.6	551.1
AF45U611	2135	600	1100	650	750	331.6	751.1


Ausrack Plus Frame – 800 mm wide

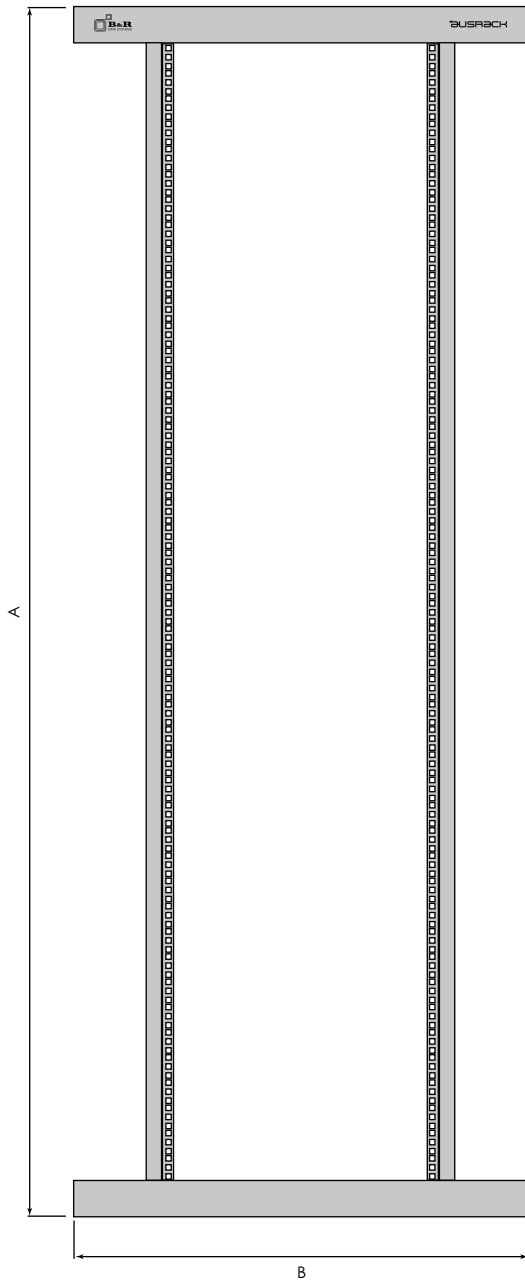

Top

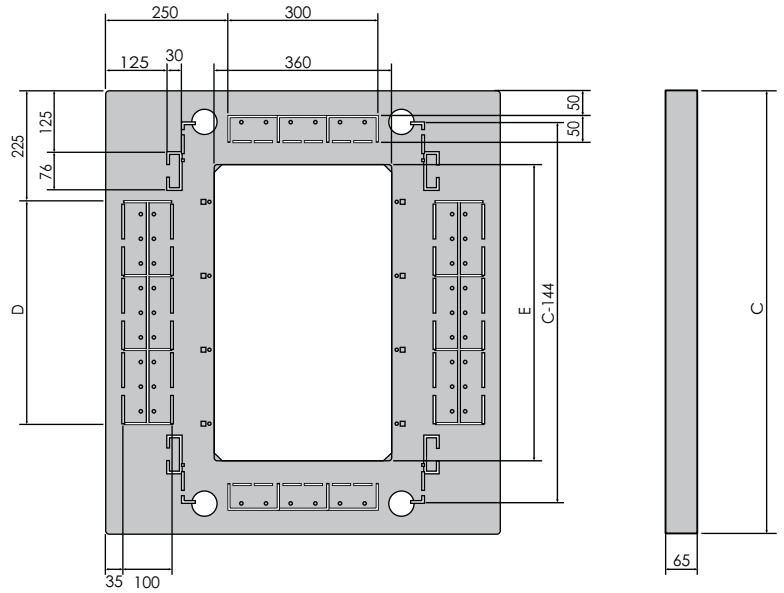

Base

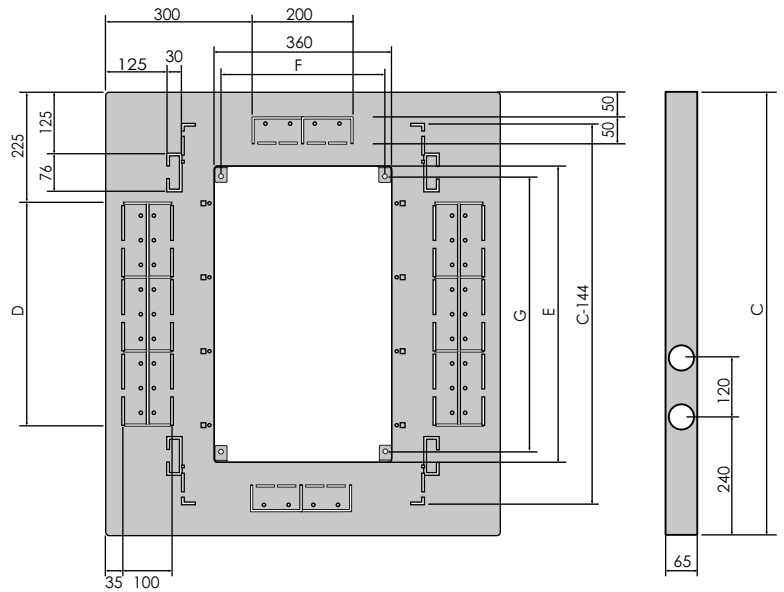

Model No	External Dimensions (mm)			Cable Aperture (mm)		Bolt Down Dimensions (mm)	
	A	B	C	D	E	F	G
AF40U809	1913	800	900	450	600	331.6	551.1
AF40U811	1913	800	1100	650	750	331.6	751.1
AF45U809	2135	800	900	450	600	331.6	551.1
AF45U811	2135	800	1100	650	750	331.6	751.1