


## Ausrack IP

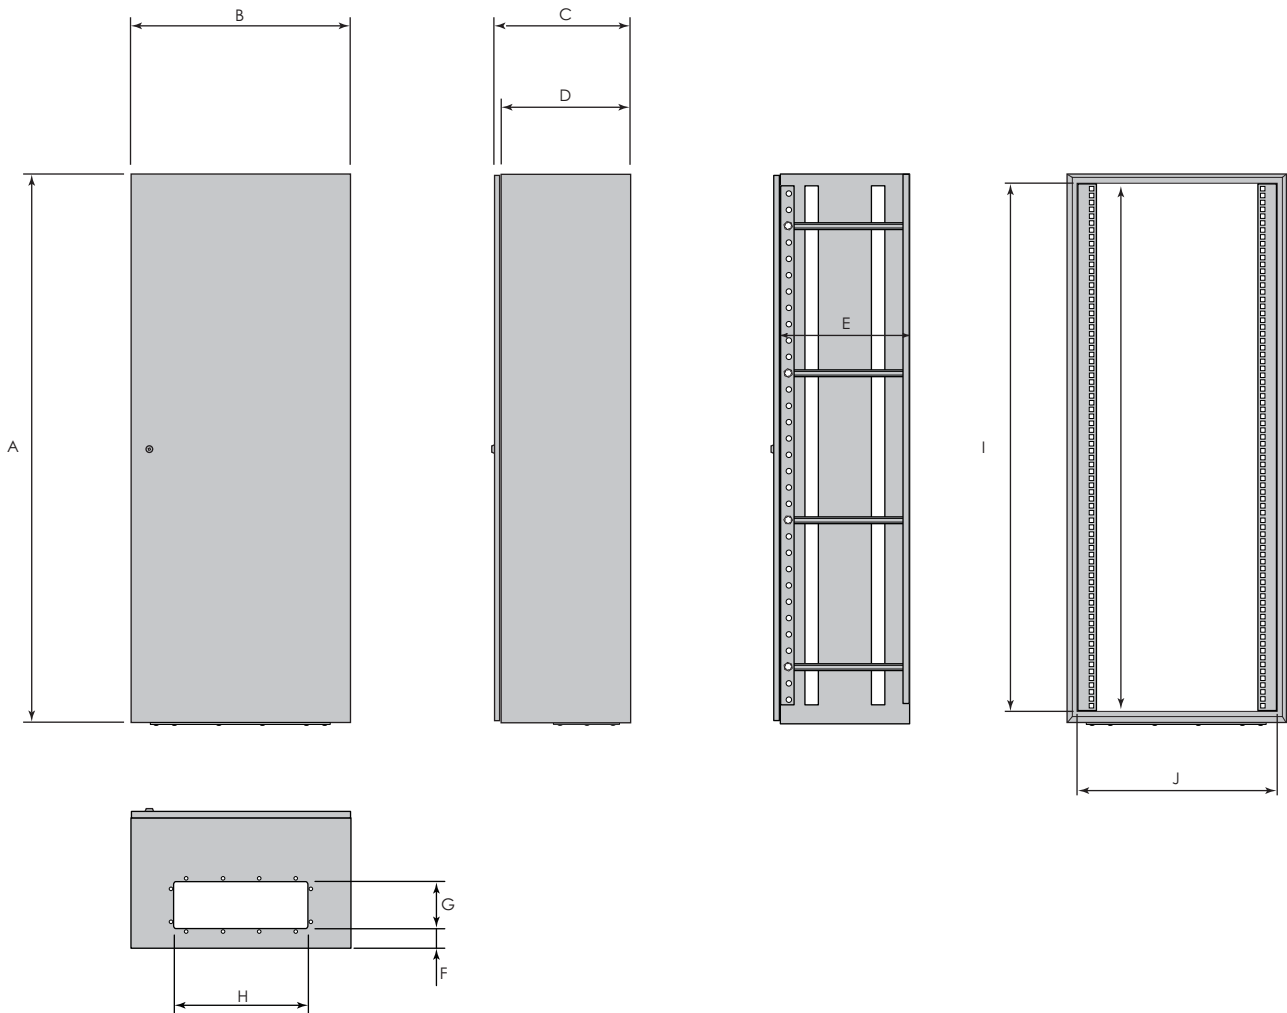

Model No	Height (RU)	External Dimensions (mm)				Internal Depth (mm)	Gland Plate (mm)			Max Usable Depth (mm)	Opening Size (mm)	
		A	B	C	D		E	F	G		H	I
ARIP11U64	11	600	600	400	374	380	73	170	490	360	350	540
ARIP15U64	15	800	600	400	374	380	73	170	490	360	740	540
ARIP15U65	15	800	600	500	474	480	73	170	490	460	740	540
ARIP15U66	15	800	600	600	574	580	73	170	490	560	740	540
ARIP24U64	24	1200	600	400	374	380	73	170	490	360	1140	540
ARIP24U65	24	1200	600	500	474	480	73	170	490	460	1140	540
ARIP24U66	24	1200	600	600	574	580	73	170	490	560	1140	540
ARIP32U66	32	1600	600	600	574	580	73	170	490	560	1540	540
ARIP38U65	38	1800	600	500	474	480	73	170	490	460	1740	540
ARIP42U65	42	2000	600	500	474	480	73	170	490	460	1940	540
ARIP42U66	42	2000	600	600	574	580	73	170	490	560	1940	540