



Ausrack Floor *anyX* 19" Light Duty Network Cabinet

Index

[Dimension Sheet](#)

[Catalogue Information](#)

[Leaflet](#)


Web Links

[Ausrack Floor *anyX* Information Page](#)


[Ask a question / Send us an enquiry](#)

[Information about B&R](#)


[Local Sales Team Phone Numbers](#)

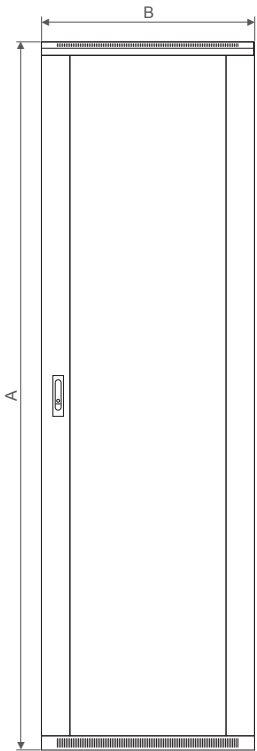


Front View

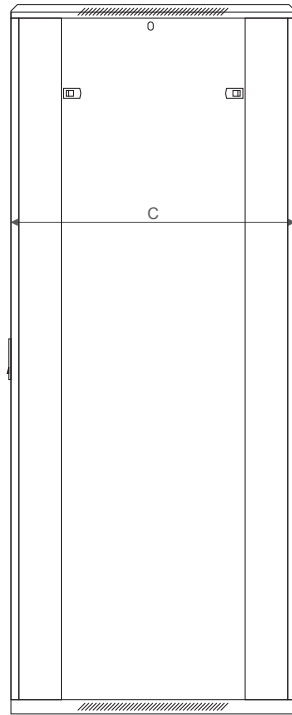

Side View



Top View

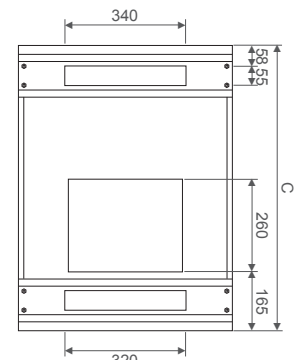

Bottom View

Dimensions (mm)

Catalogue No.	External		
	A	B	C
ARFX6622U	1115	600	600
ARFX6822U	1115	600	800
ARFX6632U	1995	600	600
ARFX6832U	1995	600	800
ARFX6932U	1995	600	960
ARFX6642U	1995	600	600
ARFX6842U	1995	600	800
ARFX6942U	1995	600	960
ARFX6647U	2200	600	600
ARFX6847U	2200	600	800
ARFX6947U	2200	600	960
ARFX8942U	1995	800	960
ARFX8947U	2200	800	960



brenclosures.com.au/arfx.htm



Features

- Suitable for small to medium standalone network applications
- Load capacity
- Specifications
 - EIA 310-D
 - SSI Specification
- Materials
 - Body – mild steel
 - Frame thickness – 1.2mm
 - Rail thickness – 2.0mm
 - Cladding panel – 1.2mm
 - Window – safety glass
- Surface finish – powdercoated

Introduction

General Purpose

Special Purpose

Ausrack Floor *onyx* is a cost effective, 19" network rack, designed for small business or standalone applications. It includes a safety glass front door, steel rear door and removable side panels in a neutral powdercoat finish.

Inclusions

- Frame, 2 x side panels
- Front tempered tinted safety glass window door
- Rear steel door
- 4 x full height RU marked and notched mounting rails
- Fixed shelf or shelves (1 on 22RU high enclosures, 3 for other heights)
- Roof mounted fan tray (2 unit for 600mm deep cabinets, 4 unit for others)
- Six way power rail, 10A SAA outlets, 10A plug
- Adjustable feet & castor kit
- Key lockable front and rear doors
- Earthing point
- Gland plates
- All assembly hardware

Multiple Applications

Hazardous Areas

Data & Communications

Selection Guide


Catalogue No.	Height (RU)	Dimensions (mm)			Load Rating (kg)	Weight (kg)
		Height*	Width	Depth		
ARFX6622U	22	1115	600	600	500	69.5
ARFX6822U	22	1115	600	800	500	105.5
ARFX6632U	32	1550	600	600	500	116.5
ARFX6832U	32	1550	600	800	500	85.0
ARFX6932U	32	1550	600	960	500	120.5
ARFX6642U	42	1995	600	600	500	116.5
ARFX6842U	42	1995	600	800	500	85.0
ARFX6942U	42	1995	600	960	500	120.5
ARFX6647U	47	2220	600	600	500	126.5
ARFX6847U	47	2220	600	800	500	139.5
ARFX6947U	47	2220	600	960	500	137.0
ARFX8942U	42	1995	800	960	500	120.5
ARFX8947U	47	2220	800	960	500	137.0

* Height does not include feet or castors

Please Note: A complete range of accessories are available. Contact your local sales engineer to discuss your requirements.



Rail



Fans



Castors & Feet

Ancillary Items

Technical Drawings

Technical Information

19" Light Duty Network Cabinets



OVERVIEW

The Ausrack Floor *onyx* is a cost effective, 19" network rack designed for small business or standalone network applications.

It includes a safety glass front door, steel rear door and removable side panels in a textured matt black powdercoated finish.

MATERIALS

Body: Mild steel
 Frame thickness: 1.2mm
 Rail thickness: 2.0mm
 Cladding panel: 1.2mm
 Window: Safety glass
 Surface finish: Powdercoated textured matt black

APPLICATION

This cabinet is commonly used for small to medium standalone network applications.

FEATURES


- EIA-310-D standards compliant
- Key lockable front and rear doors
- Safety glass front door
- Removable side panels
- Full height RU marked and notched mounting rails
- Roof mounted fan tray
- Fixed shelf or shelves (1 on 22RU, 2 on 32RU, 3 for other heights)
- Six way power rail

Catalogue No.	Height (RU)	Dimensions (mm)			Load Rating (kg)	Weight (kg)
		Height*	Width	Depth		
ARFX6622U	22	1115	600	600	500	69.5
ARFX6822U	22	1115	600	800	500	105.5
ARFX6632U	32	1550	600	600	500	116.5
ARFX6832U	32	1550	600	800	500	85.0
ARFX6932U	32	1550	600	960	500	120.5
ARFX6642U	42	1995	600	600	500	116.5
ARFX6842U	42	1995	600	800	500	85.0
ARFX6942U	42	1995	600	960	500	120.5
ARFX6647U	47	2220	600	600	500	126.5
ARFX6847U	47	2220	600	800	500	139.5
ARFX6947U	47	2220	600	960	500	137.0
ARFX8942U	42	1995	800	960	500	120.5
ARFX8947U	47	2220	800	960	500	137.0

* Height does not include feet or castors

Accessories

Product	Description	Catalogue No.
Shelves – fixed	1RU high x 350 deep	ARXFL350
	1RU high x 500 deep	ARXFL500
	1RU high x 710 deep	ARXFL710
Shelves – cantilever	1RU high x 350 deep	ARXKBC350
	1RU high x 500 deep	ARXKBC500
	1RU high x 710 deep	ARXKBC710
Cable management – rings	1RU – horizontal	ARPCMH1U
	1RU – horizontal	ARHCMF1U
Cable management – fingers	2RU – horizontal	ARHCMF2U
	4RU – horizontal	ARHCMF4U
	6x 10A outlets, 10A plug	ARPRH61010
Power rails – horizontal (10A outlets only) SAA	6x 10A outlets, 15A plug	ARPRH61015
	10x 10A outlets, 10A plug	ARPRH101010
	10x 10A outlets, 15A plug	ARPRH101015
	1RU	EBP1U
Blanking panels (black)	2RU	EBP2U
	3RU	EBP3U
	4RU	EBP4U
	5RU	EBP5U
	6RU	EBP6U
	Cage nuts	50 pack



INCLUSIONS

- Frame and 2 x side panels
- Front tempered tinted safety glass window door
- Rear steel door
- 4 x full height RU marked & notched mounting rails
- Fixed shelf or shelves (1 on 22RU, 2 on 32RU, 3 for other heights)
- Roof mounted fan tray
- 6-way power rails
- Adjustable feet & castors
- Key lockable front and rear doors
- Earthing point
- Gland plates
- All assembly hardware



Other brands in the B&R Group:



Queensland P: +61 7 3714 1000
Townsville P: +61 7 4775 6255
Sydney P: +61 2 8867 7688
Newcastle P: +61 2 4961 4433
Victoria P: +61 3 8588 8400

South Australia P: +61 8 8417 6200
Western Australia P: +61 8 9248 9744
Tasmania P: +61 3 6331 5545
Northern Territory P: +61 8 8947 0870

Email sales@brenclosures.com.au
 Web www.brenclosures.com.au