




## AUSRACK PLUS FRAME

The Ausrack Plus Frame is the most advanced, fully featured 19" rack on the Australian market today. With an innovative, inset post design and a robust construction, it retains the award winning features of the original Ausrack range.

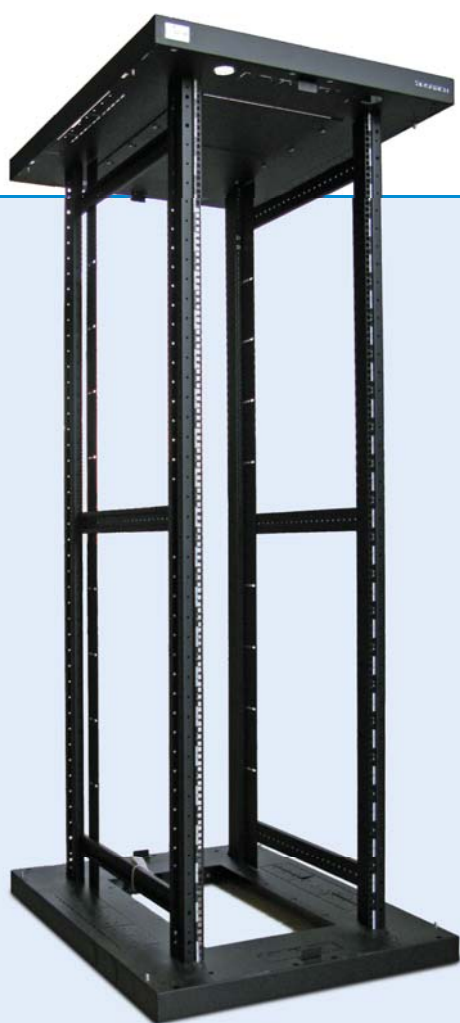

The Ausrack Plus Frame range includes the frame and rack rails only, so that you can configure with cladding to suit your data centre application. It is available in 24, 40 and 45RU heights, depths of 600, 900 and 1100mm and widths of 600 and 800mm.

The rack rails are suitable for all 19" equipment and comply with both the EIA and SSI specifications required by active equipment manufacturers. The frame design has been strengthened so that it is suitable for the heavy blade and 1RU servers commonly being installed. Tested with a uniformly distributed load (UDL) it achieved a weight rating of 1400kg, more than enough for most applications.

Recent enhancements to the range include easier installation and moving, with options of retractable feet and low profile rollers. Also cabling flexibility has been improved, as all horizontal support arms are height adjustable, and cable entries in the base are aligned for all rack depths.

A comprehensive range of accessories is available to help you find a solution to your specific requirements. These include the Ausrack Cable Zone, an extension to the side of the cabinet that can be fitted as and when required, to allow for cabling, or even cooling space.

For data centre applications, try Ausrack Plus Frame.

# AUSRACK PLUS FRAME

## Technical Information

The Ausrack® Plus Frame includes a frame, and four RU marked mounting rails.

Model Number	RU	Height	Width	Depth
AF24U606	24	1202	600	600
AF24U609	24	1202	600	900
AF24U611	24	1202	600	1100
AF40U606	40	1913	600	600
AF40U609	40	1913	600	900
AF40U611	40	1913	600	1100
AF40U809	40	1913	800	900
AF40U811	40	1913	800	1100
AF45U606	45	2135	600	600
AF45U609	45	2135	600	900
AF45U611	45	2135	600	1100
AF45U809	45	2135	800	900
AF45U811	45	2135	800	1100

24RU cabinets also supplied with ARIF flat top cover, 40 & 45RU cabinets are supplied with gland plates fitted into the roof.

## Accessories

A full range of accessories is available including mesh doors, acrylic window doors, power rails, shelves, fan kits, blanking panels, server stabiliser kits and more.

For complete details of the range of accessories ask for our catalogue or visit our website [www.brdatasystems.com.au](http://www.brdatasystems.com.au).

## Features

The Ausrack® Plus Frame is a result of extensive market research and testing. The special features incorporated as part of the range include:

- Fits all 19" equipment by complying with EIA-310-D and SSI specifications to which server manufacturers design.
- Allows a full rack to be utilised with a tested static load rating (UDL) of 1400kg and a seismic load rating of 900kg.
- Improved air flow management with options of high open area vented doors, blanking panels for the rails and cable zones, air flow directors and brush strips.
- Security features such as two point door locking with options of privacy panels and side panel latch and lock kits.
- Easy to move and repurpose with optional fully retractable adjustable feet, heavy duty rollers and a flexible cabling system.

## Data Systems Sales Offices

Brisbane	07 3714 1100
Sydney	02 9687 0077
Melbourne	03 8588 8400
Adelaide	08 8243 1166
Perth	08 9248 9744

[www.brdatasystems.com.au](http://www.brdatasystems.com.au)

